


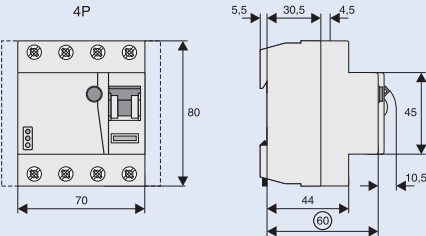


# Protective Devices


Local Indication RCCB		
Status indication LED		red / yellow / green
Permanent light green		Normal operation
Permanent light yellow		The measured residual current is bigger than 30% of the nominal tripping value.
Permanent light red		The measured residual current is bigger than 50% of the nominal tripping value.

Remote Indication	
Version:	1 contact NO up to 230V AC, 2 terminals, 1 A ohmic load
Terminal capacity of contacts:	0.25 - 1.5 mm <sup>2</sup>


**Dimensions (mm)**




**Correct connection**



3+N  
(230/400V)



3-phase  
application



2p  
(230/400V)

Test button works within 184V – 440V AC !