


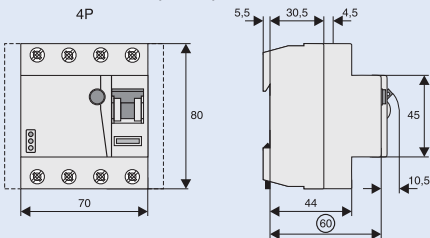

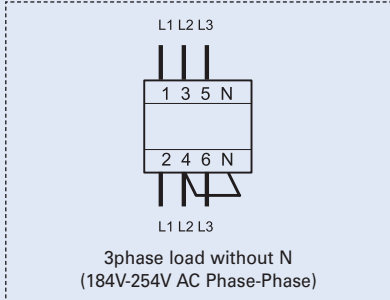
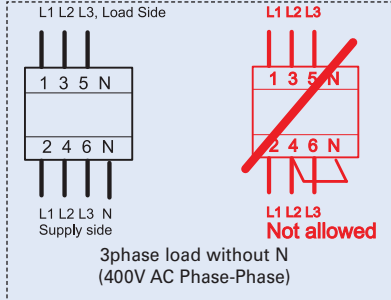



Protective Devices

Local Indication RCCB			
Status indication LED		red / yellow / green	
Permanent light green		Normal operation	
Permanent light yellow		The measured residual current is bigger than 30% of the nominal tripping value.	
Permanent light red		The measured residual current is bigger than 50% of the nominal tripping value.	
Remote Indication			
Standard Version:	1 contact NO up to 230V AC, 2 terminals, 1 A ohmic load		
Optional Version: (available upon request)	1 NO + 1 NC up to 110V AC/contact, 2x2 terminals, 1 A ohmic load		
Terminal capacity of contacts:	0.25 - 1.5 mm ²		
Dimensions (mm)			
			
Correct connection			
			
Test button works within 184V – 440V AC !, Electronic works within 50-254V AC !			